

1000W

# Inverter

Constant and stable power supply



## Product Data Sheet - Transportation

Rev.: 05/24

**Item No.:** 8000100012  
**Inverter 1000W / 12V**

**Item No.:** 8000100024  
**Inverter 1000W / 24V**

### Description

An inverter converts direct current (DC) from batteries into alternating current (AC), which can be used for electrical devices.

Our inverter has pure sine wave output and ensures that all connected devices receive a constant and stable 230V power supply.

### Product Features

- High efficiency 84-94%
- Automatic power-off at Short Circuit
- Protected against overheating
- Fan-cooled at high temperature
- Soft start
- Comes with wired remote control
- Schuko sockets as standard

Extension cable for remote control of 10 meters – **Item No.:** 8000010220


### Product Data

Model	DC Input (VDC)						
	Over voltage		Under voltage alarm	Under voltage		Over temp. protection	
	Shut-down	Restart		Shut-down	Restart	Shut-down	Restart
<b>12V</b>	16V	15V	11V	<10.5V	12V	55°C	45°C
<b>24V</b>	32V	31V	22V	<21V	24V		


<b>Output voltage</b>	220-240V 50Hz
<b>Dimensions</b>	L=268 mm, W=168 mm, H=95 mm
<b>Weight</b>	2,40 kg
<b>Protection</b>	Input low voltage alarm & shutdown, overload, short circuit, input over voltage, over temperature, reverse polarity.

### Instructions

Please read the manual before installation and operation.

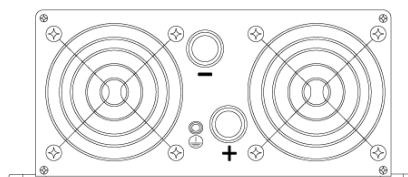

INPUT side

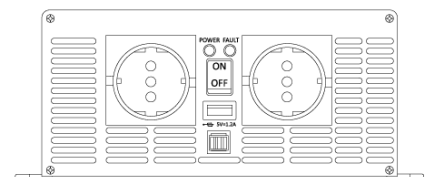

OUTPUT side

