



2000W

Inverter

Constant and stable power supply

Product Data Sheet - Transportation

Rev.: 05/24

Item No.: 8000230216
Inverter 2000W / 12V / 230V

Description

An inverter converts direct current (DC) from batteries into alternating current (AC), which can be used for electrical devices.

Our inverter has pure sine wave output and ensures that all connected devices receive a constant and stable 230V power supply.

Product Features

- High efficiency 84-94%
- Automatic power-off at Short Circuit
- Protected against overheating
- Fan-cooled at high temperature
- Soft start
- Comes with wired remote control
- Schuko sockets as standard

Extension cable for remote control of 10 meters – **Item No.:** 8000010220


Product Data

Model	DC Input (VDC)					
	Over voltage		Under voltage		Over temp. protection	
	Shut-down	Restart	Shut-down	Restart	Shut-down	Restart
12V	15,5V	14,5V	<10.5V	10V	55°C	45°C


Output voltage	220-240V 50Hz
Dimensions	L=350 mm, W=257 mm, H=103 mm
Weight	4,60 kg
Protection	Input low voltage alarm & shutdown, overload, short circuit, input over voltage, over temperature, reverse polarity.

Instructions

Please read the manual before installation and operation.

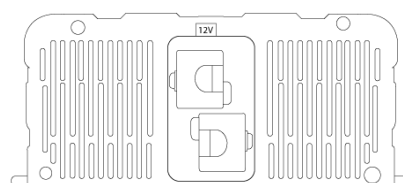

INPUT side

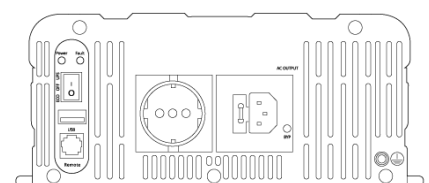

OUTPUT side

